

# Exhibit 13

US010225479B2

(12) **United States Patent**  
**Shabtay et al.**

(10) **Patent No.:** **US 10,225,479 B2**

(45) **Date of Patent:** **Mar. 5, 2019**

(54) **DUAL APERTURE ZOOM DIGITAL CAMERA**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Corephotonics Ltd.**, Tel Aviv (IL)

2,354,503 A 7/1944 Cox  
2,378,170 A 6/1945 Aklin  
(Continued)

(72) Inventors: **Gal Shabtay**, Tel Aviv (IL); **Ephraim Goldenberg**, Ashdod (IL); **Oded Gigushinski**, Herzlia (IL); **Noy Cohen**, Tel Aviv (IL)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Corephotonics Ltd.**, Tel Aviv (IL)

CN 101276415 A 10/2008  
CN 102739949 A 10/2012  
(Continued)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

Statistical Modeling and Performance Characterization of a Real-Time Dual Camera Surveillance System, Greienhagen et al., Publisher: IEEE, 2000, 8 pages.

(21) Appl. No.: **16/048,242**

(22) Filed: **Jul. 28, 2018**

(65) **Prior Publication Data**

US 2018/0359423 A1 Dec. 13, 2018

(Continued)

*Primary Examiner* — Cynthia Segura

(74) *Attorney, Agent, or Firm* — Nathan and Associates; Menachem Nathan

(57) **ABSTRACT**

A dual-aperture zoom digital camera operable in both still and video modes. The camera includes Wide and Tele imaging sections with respective lens/sensor combinations and image signal processors and a camera controller operatively coupled to the Wide and Tele imaging sections. The Wide and Tele imaging sections provide respective image data. The controller is configured to combine in still mode at least some of the Wide and Tele image data to provide a fused output image from a particular point of view, and to provide without fusion continuous zoom video mode output images, each output image having a given output resolution, wherein the video mode output images are provided with a smooth transition when switching between a lower zoom factor (ZF) value and a higher ZF value or vice versa, and wherein at the lower ZF the output resolution is determined by the Wide sensor while at the higher ZF value the output resolution is determined by the Tele sensor.

**Related U.S. Application Data**


(63) Continuation of application No. 15/865,869, filed on Jan. 9, 2018, which is a continuation of application (Continued)

(51) **Int. Cl.**  
**H04N 5/232** (2006.01)  
**H04N 5/225** (2006.01)  
(Continued)

(52) **U.S. Cl.**  
CPC ..... **H04N 5/23296** (2013.01); **G02B 13/009** (2013.01); **G02B 13/0015** (2013.01);  
(Continued)

(58) **Field of Classification Search**  
CPC ..... G02B 13/0015; G02B 27/0075  
See application file for complete search history.

**40 Claims, 8 Drawing Sheets**

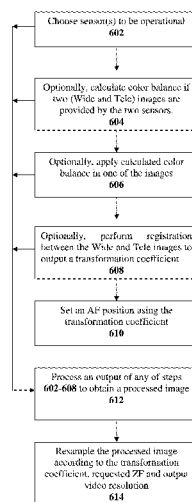

## US 10,225,479 B2

Page 2

## Related U.S. Application Data

- No. 15/424,853, filed on Feb. 5, 2017, now Pat. No. 10,015,408, which is a continuation of application No. 14/880,251, filed on Oct. 11, 2015, now Pat. No. 9,661,233, which is a continuation of application No. 14/365,711, filed as application No. PCT/IB2014/062180 on Jun. 12, 2014, now Pat. No. 9,185,291.
- (60) Provisional application No. 61/834,486, filed on Jun. 13, 2013.
- (51) **Int. Cl.**  
**G02B 13/00** (2006.01)  
**G02B 27/00** (2006.01)
- (52) **U.S. Cl.**  
CPC ..... **G02B 27/0075** (2013.01); **H04N 5/225** (2013.01); **H04N 5/2258** (2013.01); **H04N 5/2259** (2013.01); **H04N 5/23212** (2013.01); **H04N 5/23232** (2013.01); **H04N 5/23245** (2013.01)

## (56) References Cited

## U.S. PATENT DOCUMENTS

2,441,093 A	5/1948	Aklin	7,339,621 B2	3/2008	Fortier
3,388,956 A	6/1968	Eggert et al.	7,346,217 B1	3/2008	Gold, Jr.
3,524,700 A	8/1970	Eggert et al.	7,365,793 B2	4/2008	Cheatle et al.
3,864,027 A	2/1975	Harada	7,411,610 B2	8/2008	Doyle
3,942,876 A	3/1976	Betensky	7,424,218 B2	9/2008	Baudisch et al.
4,134,645 A	1/1979	Sugiyama et al.	7,509,041 B2	3/2009	Hosono
4,199,785 A	4/1980	McCullough et al.	7,515,351 B2	4/2009	Chen et al.
4,338,001 A	7/1982	Matsui	7,533,819 B2	5/2009	Barkan et al.
4,465,345 A	8/1984	Yazawa	7,564,635 B1	7/2009	Tang
5,000,551 A	3/1991	Shibayama	7,619,683 B2	11/2009	Davis
5,005,083 A	4/1991	Grage et al.	7,643,225 B1	1/2010	Tsai
5,032,917 A	7/1991	Aschwanden	7,660,049 B2	2/2010	Tang
5,051,830 A	9/1991	von Hoessle	7,684,128 B2	3/2010	Tang
5,248,971 A	9/1993	Mandl	7,688,523 B2	3/2010	Sano
5,287,093 A	2/1994	Amano et al.	7,692,877 B2	4/2010	Tang et al.
5,436,660 A	7/1995	Sakamoto	7,697,220 B2	4/2010	Iyama
5,444,478 A	8/1995	Lelong et al.	7,738,016 B2	6/2010	Toyofuku
5,459,520 A	10/1995	Sasaki	7,738,186 B2	6/2010	Chen et al.
5,657,402 A	8/1997	Bender et al.	7,773,121 B1	8/2010	Huntsberger et al.
5,682,198 A	10/1997	Katayama et al.	7,777,972 B1	8/2010	Chen et al.
5,768,443 A	6/1998	Michael et al.	7,813,057 B2	10/2010	Lin
5,926,190 A	7/1999	Turkowski et al.	7,821,724 B2	10/2010	Tang et al.
5,940,641 A	8/1999	McIntyre et al.	7,826,149 B2	11/2010	Tang et al.
5,982,951 A	11/1999	Katayama et al.	7,826,151 B2	11/2010	Tsai
6,101,334 A	8/2000	Fantone	7,869,142 B2	1/2011	Chen et al.
6,128,416 A	10/2000	Oura	7,880,776 B2	2/2011	LeGall et al.
6,148,120 A	11/2000	Sussman	7,898,747 B2	3/2011	Tang
6,208,765 B1	3/2001	Bergen	7,916,401 B2	3/2011	Chen et al.
6,268,611 B1	7/2001	Pettersson et al.	7,918,398 B2	4/2011	Li et al.
6,549,215 B2	4/2003	Jouppi	7,957,075 B2	6/2011	Tang
6,611,289 B1	8/2003	Yu et al.	7,957,076 B2	6/2011	Tang
6,643,416 B1	11/2003	Daniels et al.	7,957,079 B2	6/2011	Tang
6,650,368 B1	11/2003	Doron	7,961,406 B2	6/2011	Tang et al.
6,654,180 B2	11/2003	Ori	7,964,835 B2	6/2011	Olsen et al.
6,680,748 B1	1/2004	Monti	7,978,239 B2	7/2011	Deever et al.
6,714,665 B1	3/2004	Hanna et al.	8,000,031 B1	8/2011	Tsai
6,724,421 B1	4/2004	Glatt	8,004,777 B2	8/2011	Yoshihito Souma
6,738,073 B2	5/2004	Park et al.	8,077,400 B2	12/2011	Tang
6,741,250 B1	5/2004	Furlan et al.	8,115,825 B2	2/2012	Culbert et al.
6,750,903 B1	6/2004	Miyatake et al.	8,149,327 B2	4/2012	Lin et al.
6,778,207 B1	8/2004	Lee et al.	8,149,523 B2	4/2012	Ozaki
7,002,583 B2	2/2006	Rabb, III	8,154,610 B2	4/2012	Jo et al.
7,015,954 B1	3/2006	Footo et al.	8,218,253 B2	7/2012	Tang
7,038,716 B2	5/2006	Klein et al.	8,228,622 B2	7/2012	Tang
7,187,504 B2	3/2007	Horiuchi	8,233,224 B2	7/2012	Chen
7,199,348 B2	4/2007	Olsen et al.	8,238,695 B1	8/2012	Davey et al.
7,206,136 B2	4/2007	Labaziewicz et al.	8,253,843 B2	8/2012	Lin
7,248,294 B2	7/2007	Slatter	8,274,552 B2	9/2012	Dahi et al.
7,256,944 B2	8/2007	Labaziewicz et al.	8,279,537 B2	10/2012	Sato
7,305,180 B2	12/2007	Labaziewicz et al.	8,363,337 B2	1/2013	Tang et al.
			8,390,729 B2	3/2013	Long et al.
			8,391,697 B2	3/2013	Cho et al.
			8,395,851 B2	3/2013	Tang et al.
			8,400,555 B1	3/2013	Georgiev et al.
			8,400,717 B2	3/2013	Chen et al.
			8,439,265 B2	5/2013	Ferren et al.
			8,446,484 B2	5/2013	Muukki et al.
			8,451,549 B2	5/2013	Yamanaka et al.
			8,483,452 B2	7/2013	Ueda et al.
			8,503,107 B2	8/2013	Chen et al.
			8,508,649 B2 *	8/2013	Reshidko ..... G02B 13/0045 348/345
			8,514,491 B2	8/2013	Duparre
			8,514,502 B2	8/2013	Chen
			8,547,389 B2	10/2013	Hoppe et al.
			8,553,106 B2	10/2013	Scarff
			8,587,691 B2	11/2013	Takane
			8,619,148 B1	12/2013	Watts et al.
			8,780,465 B2	7/2014	Chae
			8,803,990 B2	8/2014	Smith
			8,810,923 B2	8/2014	Shinohara
			8,854,745 B1	10/2014	Chen
			8,896,655 B2	11/2014	Mauchly et al.
			8,958,164 B2	2/2015	Kwon et al.
			8,976,255 B2	3/2015	Matsuoto et al.
			9,019,387 B2	4/2015	Nakano
			9,025,073 B2	5/2015	Attar et al.
			9,025,077 B2	5/2015	Attar et al.
			9,041,835 B2	5/2015	Honda

## US 10,225,479 B2

Page 3

(56)	<b>References Cited</b>		2008/0030592	A1 *	2/2008	Border .....	H04N 5/232 348/218.1
	U.S. PATENT DOCUMENTS		2008/0030611	A1	2/2008	Jenkins	
			2008/0084484	A1	4/2008	Ochi et al.	
9,137,447	B2	9/2015 Shibuno	2008/0117316	A1	5/2008	Orimoto	
9,185,291	B1	11/2015 Shabtay et al.	2008/0218611	A1	9/2008	Parulski et al.	
9,215,377	B2	12/2015 Sokeila et al.	2008/0218612	A1	9/2008	Border et al.	
9,215,385	B2	12/2015 Luo	2008/0218613	A1 *	9/2008	Janson .....	G03B 15/00 348/262
9,229,194	B2	1/2016 Yoneyama et al.				Border .....	H04N 5/23212 396/89
9,235,036	B2	1/2016 Kato et al.	2008/0219654	A1 *	9/2008	Border .....	
9,270,875	B2	2/2016 Brisedoux et al.					
9,279,957	B2	3/2016 Kanda et al.	2008/0304161	A1	12/2008	Souma	
9,286,680	B1	3/2016 Jiang et al.	2009/0086074	A1	4/2009	Li et al.	
9,344,626	B2	5/2016 Silverstein et al.	2009/0122195	A1	5/2009	Van Baar et al.	
9,360,671	B1	6/2016 Zhou	2009/0122406	A1	5/2009	Rouvinen et al.	
9,369,621	B2	6/2016 Malone et al.	2009/0122423	A1	5/2009	Park et al.	
9,402,032	B2 *	7/2016 Dror .....	2009/0128644	A1	5/2009	Camp et al.	
9,413,930	B2	8/2016 Geerds	2009/0219547	A1	9/2009	Kauhanen et al.	
9,413,984	B2	8/2016 Attar et al.	2009/0252484	A1	10/2009	Hasuda et al.	
9,420,180	B2	8/2016 Jin	2009/0295949	A1	12/2009	Ojala	
9,438,792	B2	9/2016 Nakada et al.	2010/0013906	A1	1/2010	Border et al.	
9,485,432	B1	11/2016 Medasani et al.	2010/0020221	A1	1/2010	Tupman et al.	
9,488,802	B2	11/2016 Chen et al.	2010/0060746	A9	3/2010	Olsen et al.	
9,568,712	B2	2/2017 Dror et al.	2010/0103194	A1	4/2010	Chen et al.	
9,578,257	B2	2/2017 Attar et al.	2010/0238327	A1	9/2010	Griffith et al.	
9,618,748	B2	4/2017 Munger et al.	2010/0283842	A1	11/2010	Guissin et al.	
9,678,310	B2	6/2017 Iwasaki et al.	2011/0001838	A1	1/2011	Lee	
9,681,057	B2	6/2017 Attar et al.	2011/0064327	A1 *	3/2011	Dagher .....	G06T 5/004 382/263
9,723,220	B2	8/2017 Sugie					
9,736,365	B2	8/2017 Laroia	2011/0080487	A1	4/2011	Venkataraman et al.	
9,736,391	B2	8/2017 Du et al.	2011/0115965	A1	5/2011	Engelhardt et al.	
9,762,812	B2 *	9/2017 Belote .....	2011/0128288	A1	6/2011	Petrou et al.	
9,768,310	B2	9/2017 Ahn et al.	2011/0164172	A1	7/2011	Shintani et al.	
9,800,798	B2	10/2017 Ravirala et al.	2011/0229054	A1	9/2011	Weston et al.	
9,817,213	B2	11/2017 Mercado	2011/0234853	A1	9/2011	Hayashi et al.	
9,851,803	B2	12/2017 Fisher et al.	2011/0234881	A1	9/2011	Wakabayashi et al.	
9,894,287	B2	2/2018 Qian et al.	2011/0242286	A1	10/2011	Pace et al.	
9,900,522	B2	2/2018 Lu	2011/0242355	A1	10/2011	Goma et al.	
9,927,600	B2	3/2018 Goldenberg et al.	2012/0026366	A1 *	2/2012	Golan .....	H04N 5/232 348/240.2
2002/0005902	A1	1/2002 Yuen					
2002/0063711	A1	5/2002 Park et al.	2012/0062780	A1	3/2012	Morihisa	
2002/0075258	A1	6/2002 Park et al.	2012/0069235	A1	3/2012	Imai	
2002/0122113	A1	9/2002 Foote	2012/0075489	A1	3/2012	Nishihara	
2003/0030729	A1	2/2003 Prentice et al.	2012/0092777	A1	4/2012	Tochigi et al.	
2003/0093805	A1	5/2003 Gin	2012/0105579	A1	5/2012	Jeon et al.	
2003/0160886	A1	8/2003 Misawa et al.	2012/0105708	A1	5/2012	Hagiwara	
2003/0202113	A1	10/2003 Yoshikawa	2012/0154929	A1	6/2012	Tsai et al.	
2004/0008773	A1	1/2004 Itokawa	2012/0196648	A1	8/2012	Havens et al.	
2004/0017386	A1	1/2004 Liu et al.	2012/0229663	A1	9/2012	Nelson et al.	
2004/0027367	A1	2/2004 Pili	2012/0249815	A1	10/2012	Bohn et al.	
2004/0061788	A1	4/2004 Bateman	2012/0287315	A1	11/2012	Huang et al.	
2004/0240052	A1	12/2004 Minefuji et al.	2012/0320467	A1	12/2012	Baik et al.	
2005/0013509	A1	1/2005 Samadani	2013/0002928	A1	1/2013	Imai	
2005/0046740	A1	3/2005 Davis	2013/0093842	A1	4/2013	Yahata	
2005/0141103	A1	6/2005 Nishina	2013/0135445	A1	5/2013	Dahi et al.	
2005/0157184	A1	7/2005 Nakanishi et al.	2013/0182150	A1	7/2013	Asakura	
2005/0168840	A1	8/2005 Kobayashi et al.	2013/0201360	A1	8/2013	Song	
2005/0200718	A1	9/2005 Lee	2013/0202273	A1	8/2013	Ouedraogo et al.	
2006/0054782	A1	3/2006 Olsen et al.	2013/0208178	A1	8/2013	Park	
2006/0056056	A1	3/2006 Ahiska et al.	2013/0235224	A1	9/2013	Park et al.	
2006/0125937	A1	6/2006 LeGall et al.	2013/0250150	A1	9/2013	Malone et al.	
2006/0170793	A1	8/2006 Pasquarette et al.	2013/0258044	A1	10/2013	Betts-LaCroix	
2006/0175549	A1	8/2006 Miller et al.	2013/0286488	A1	10/2013	Chae	
2006/0187310	A1	8/2006 Janson et al.	2013/0321668	A1	12/2013	Kamath	
2006/0187322	A1	8/2006 Janson et al.	2014/0022436	A1	1/2014	Kim et al.	
2006/0187338	A1	8/2006 May et al.	2014/0049615	A1	2/2014	Uwagawa	
2007/0024737	A1	2/2007 Nakamura et al.	2014/0118584	A1	5/2014	Lee et al.	
2007/0146503	A1 *	6/2007 Shiraki .....	2014/0192238	A1	7/2014	Attar et al.	
			2014/0192253	A1	7/2014	Laroia	
			2014/0204480	A1	7/2014	Jo et al.	
2007/0177025	A1	8/2007 Kopet et al.	2014/0285907	A1	9/2014	Tang et al.	
2007/0188653	A1	8/2007 Pollock et al.	2014/0293453	A1	10/2014	Ogino et al.	
2007/0189386	A1	8/2007 Imagawa et al.	2014/0313316	A1	10/2014	Olsson et al.	
2007/0229983	A1	10/2007 Saori	2014/0362242	A1	12/2014	Takizawa	
2007/0257184	A1	11/2007 Olsen et al.	2014/0362274	A1	12/2014	Christie et al.	
2007/0285550	A1	12/2007 Son	2015/0002683	A1	1/2015	Hu et al.	
2008/0017557	A1	1/2008 Witdouch	2015/0042870	A1	2/2015	Chan et al.	
2008/0024614	A1	1/2008 Li et al.	2015/0092066	A1	4/2015	Geiss et al.	
2008/0025634	A1	1/2008 Border et al.	2015/0116569	A1	4/2015	Mercado	

## US 10,225,479 B2

Page 4

(56)

## References Cited

## U.S. PATENT DOCUMENTS

2015/0154776	A1	6/2015	Zhang et al.	
2015/0162048	A1	6/2015	Hirata et al.	
2015/0195458	A1	7/2015	Nakayama et al.	
2015/0215516	A1	7/2015	Dolgin	
2015/0237280	A1	8/2015	Choi et al.	
2015/0242994	A1	8/2015	Shen	
2015/0253647	A1	9/2015	Mercado	
2015/0271471	A1	9/2015	Hsieh et al.	
2015/0316744	A1	11/2015	Chen	
2015/0334309	A1	11/2015	Peng et al.	
2016/0044250	A1	2/2016	Shabtay et al.	
2016/0070088	A1	3/2016	Koguchi	
2016/0085089	A1	3/2016	Mercado	
2016/0154202	A1	6/2016	Wippermann et al.	
2016/0154204	A1	6/2016	Lim et al.	
2016/0187631	A1	6/2016	Choi et al.	
2016/0191819	A1*	6/2016	Sakai	H04N 5/23245 348/333.12
2016/0202453	A1*	7/2016	Iwasawa	G02B 13/18 359/684
2016/0212358	A1	7/2016	Shikata	
2016/0301840	A1	10/2016	Du et al.	
2016/0313537	A1	10/2016	Mercado	
2016/0353012	A1	12/2016	Kao et al.	
2017/0019616	A1	1/2017	Zhu et al.	
2017/0054911	A1*	2/2017	Lee	H04N 5/23293
2017/0102522	A1	4/2017	Jo	
2017/0115471	A1	4/2017	Shinohara	
2017/0214846	A1	7/2017	Du et al.	
2017/0214866	A1	7/2017	Zhu et al.	
2017/0289458	A1	10/2017	Song et al.	
2018/0096487	A1*	4/2018	Nash	H04N 5/217
2018/0120674	A1	5/2018	Avivi et al.	
2018/0150973	A1	5/2018	Tang et al.	
2018/0152640	A1*	5/2018	Shabtay	H04N 5/2258
2018/0224630	A1	8/2018	Lee et al.	
2018/0241922	A1	8/2018	Baldwin et al.	
2018/0295292	A1	10/2018	Lee et al.	
2018/0359423	A1*	12/2018	Shabtay	H04N 5/2258

## FOREIGN PATENT DOCUMENTS

CN	103024272	A	4/2013
CN	104297906	A	1/2015
EP	1536633	A1	6/2005
EP	2523450	A1	11/2012
JP	S54157620	A	12/1979
JP	S59121015	A	7/1984
JP	04211230	A	8/1992
JP	H07318864	A	12/1995
JP	08271976	A	10/1996
JP	2003298920	A	10/2003
JP	2004133054	A	4/2004
JP	2005099265	A	4/2005
JP	2006238325	A	9/2006
JP	2007228006	A	9/2007
JP	2007306282	A	11/2007

JP	2008076485	A	4/2008
JP	2012203234	A	10/2012
JP	2013106289	A	5/2013
KR	20100008936	A	1/2010
KR	20140014787	A	2/2014
KR	20140023552	A	2/2014
KR	101477178	B1	12/2014
WO	2013058111	A1	4/2013
WO	2013063097	A1	5/2013

## OTHER PUBLICATIONS

A 3MPixel Multi-Aperture Image Sensor with 0.7 $\mu$ m Pixels in 0.11 $\mu$ m CMOS, Fife et al., Stanford University, 2008, 3 pages.

Dual camera intelligent sensor for high definition 360 degrees surveillance, Scotti et al., Publisher: IET, May 9, 2000, 8 pages.

Dual-sensor foveated imaging system, Hua et al., Publisher: Optical Society of America, Jan. 14, 2008, 11 pages.

Defocus Video Matting, McGuire et al., Publisher: ACM SIG-GRAPH, Jul. 31, 2005, 11 pages.

Compact multi-aperture imaging with high angular resolution, Santacana et al., Publisher: Optical Society of America, 2015, 10 pages.

Multi-Aperture Photography, Green et al., Publisher: Mitsubishi Electric Research Laboratories, Inc., Jul. 2007, 10 pages.

Multispectral Bilateral Video Fusion, Bennett et al., Publisher: IEEE, May 2007, 10 pages.

Super-resolution imaging using a camera array, Santacana et al., Publisher: Optical Society of America, 2014, 6 pages.

Optical Splitting Trees for High-Precision Monocular Imaging, McGuire et al., Publisher: IEEE, 2007, 11 pages.

High Performance Imaging Using Large Camera Arrays, Wilburn et al., Publisher: Association for Computing Machinery, Inc., 2005, 12 pages.

Real-time Edge-Aware Image Processing with the Bilateral Grid, Chen et al., Publisher: ACM SIGGRAPH, 9 pages.

Superimposed multi-resolution imaging, Caries et al., Publisher: Optical Society of America, 2017, 13 pages.

Viewfinder Alignment, Adams et al., Publisher: EUROGRAPHICS, 2008, 10 pages.

Dual-Camera System for Multi-Level Activity Recognition, Bodor et al., Publisher: IEEE, Oct. 2014, 6 pages.

Engineered to the task: Why camera-phone cameras are different, Giles Humpston, Publisher: Solid State Technology, Jun. 2009, 3 pages.

A compact and cost effective design for cell phone zoom lens, Chang et al., Sep. 2007, 8 pages.

Consumer Electronic Optics: How small a lens can be? The case of panomorph lenses, Thibault et al., Sep. 2014, 7 pages.

Optical design of camera optics for mobile phones, Steinich et al., 2012, pp. 51-58 (8 pages).

The Optics of Miniature Digital Camera Modules, Bareau et al., 2006, 11 pages.

Modeling and measuring liquid crystal tunable lenses, Peter P. Clark, 2014, 7 pages.

Mobile Platform Optical Design, Peter P. Clark, 2014, 7 pages.

\* cited by examiner

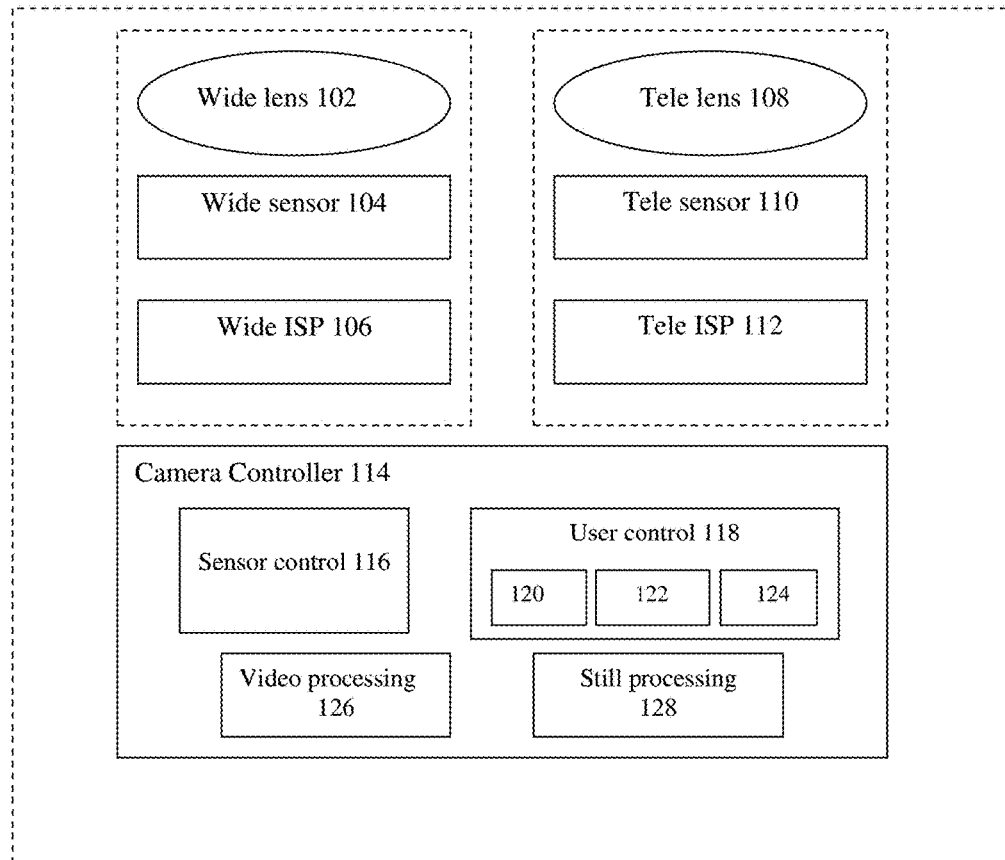
100

FIG. 1A

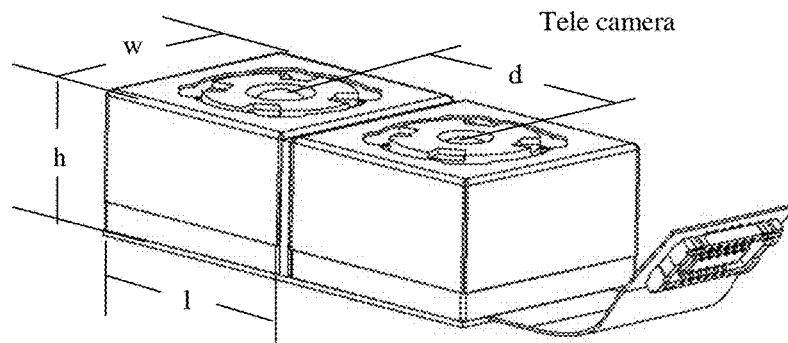


FIG. 1B

**U.S. Patent**

**Mar. 5, 2019**

**Sheet 2 of 8**

**US 10,225,479 B2**

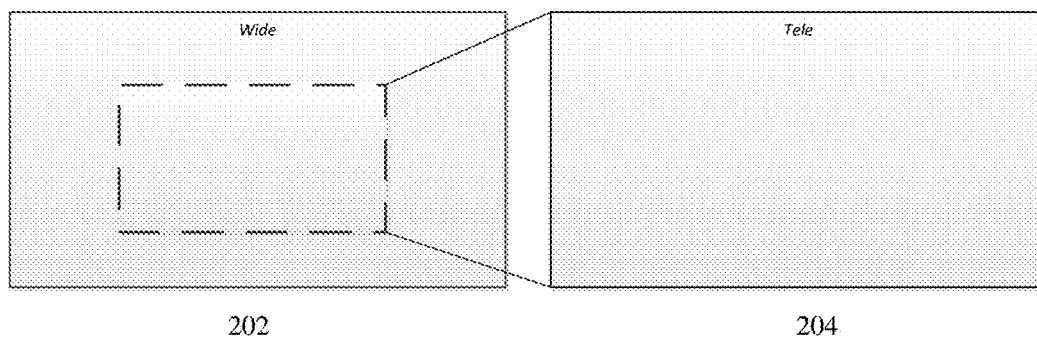


FIG. 2

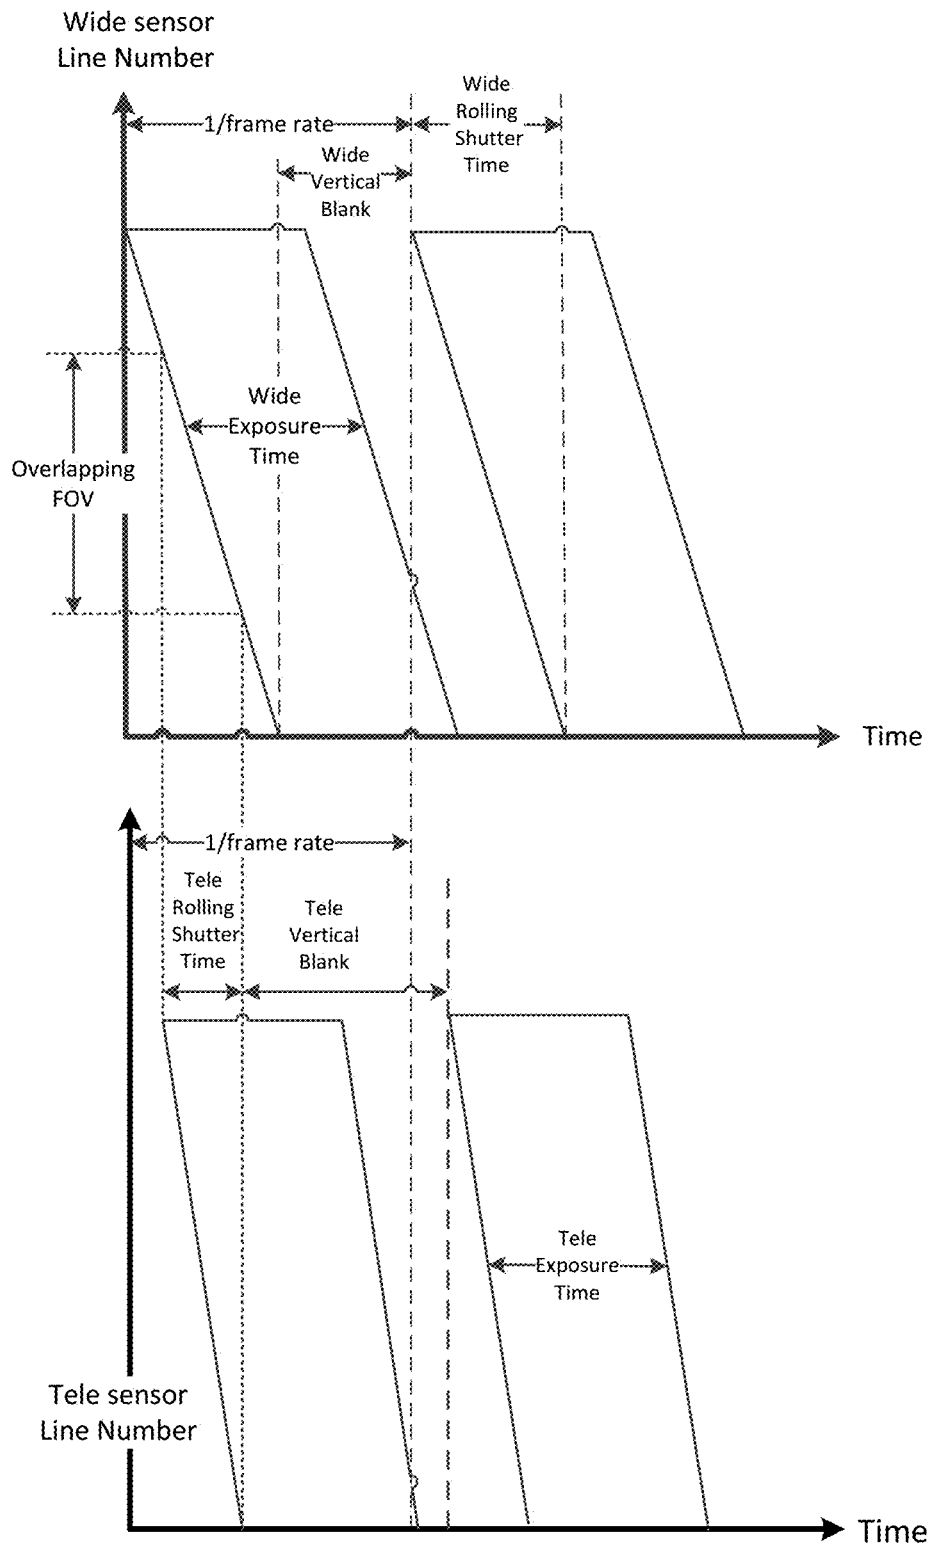


FIG. 3



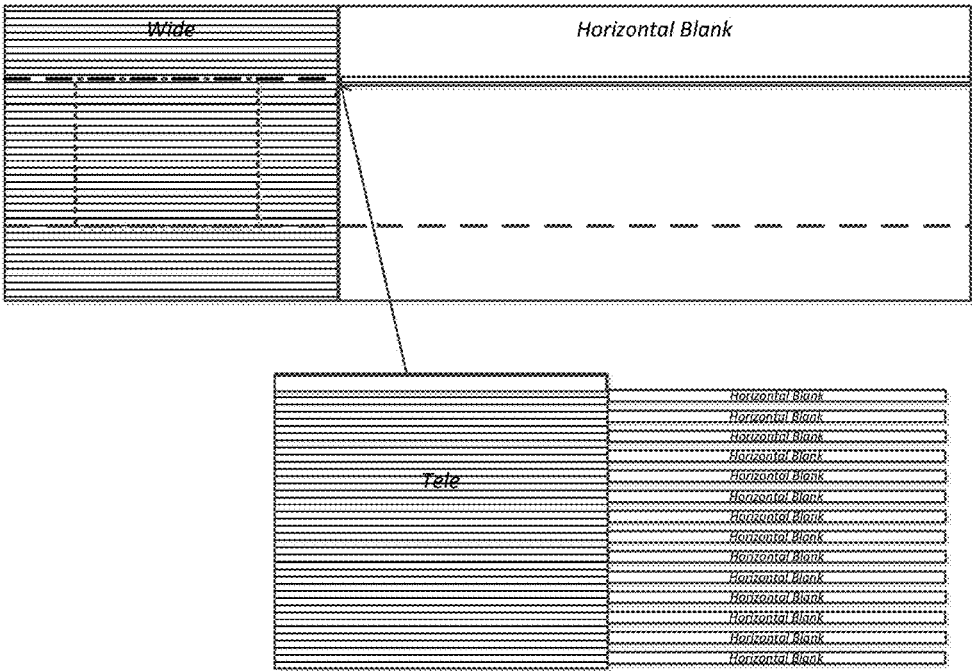


FIG. 4

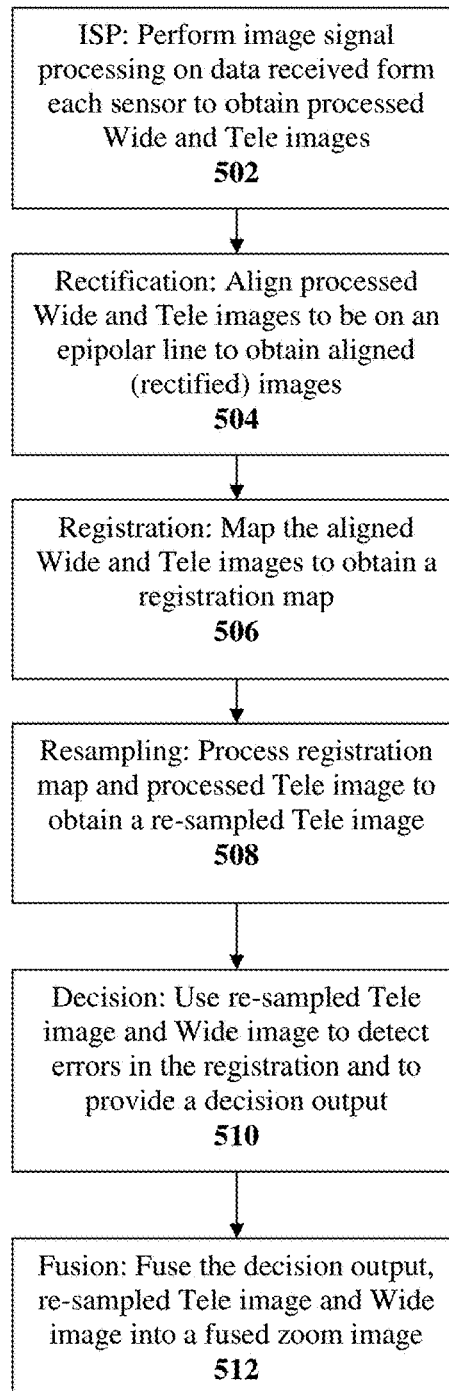


FIG. 5

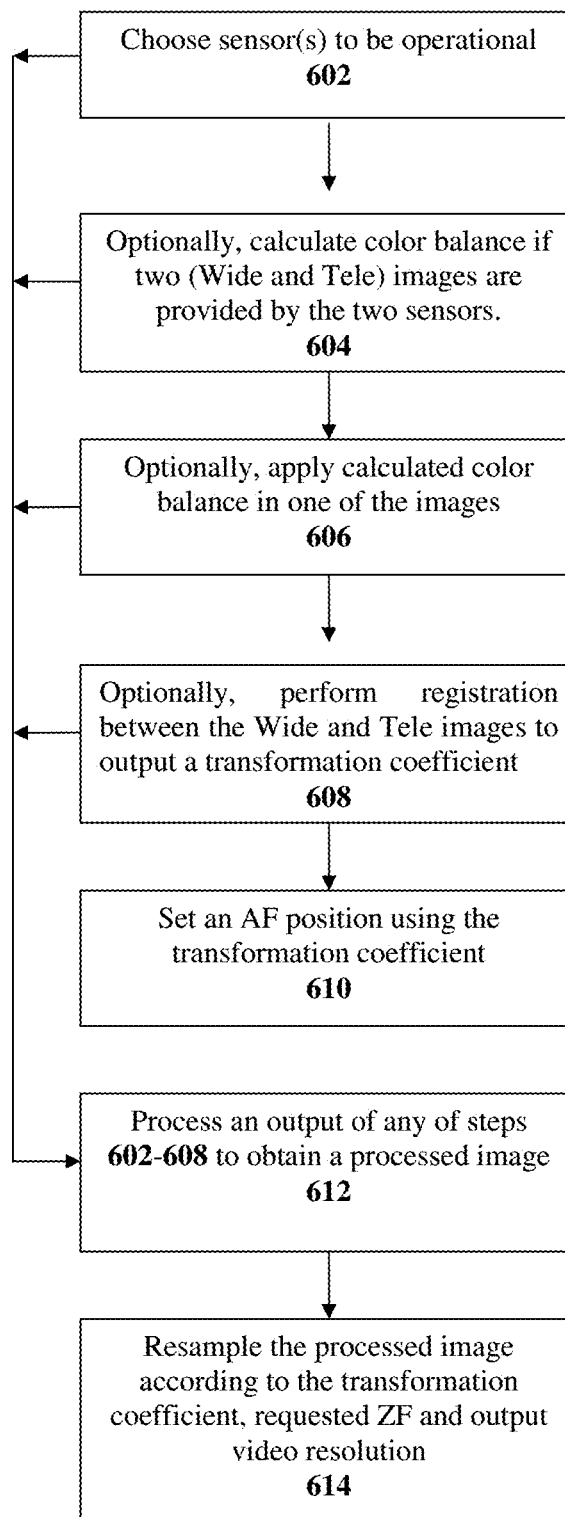


FIG. 6

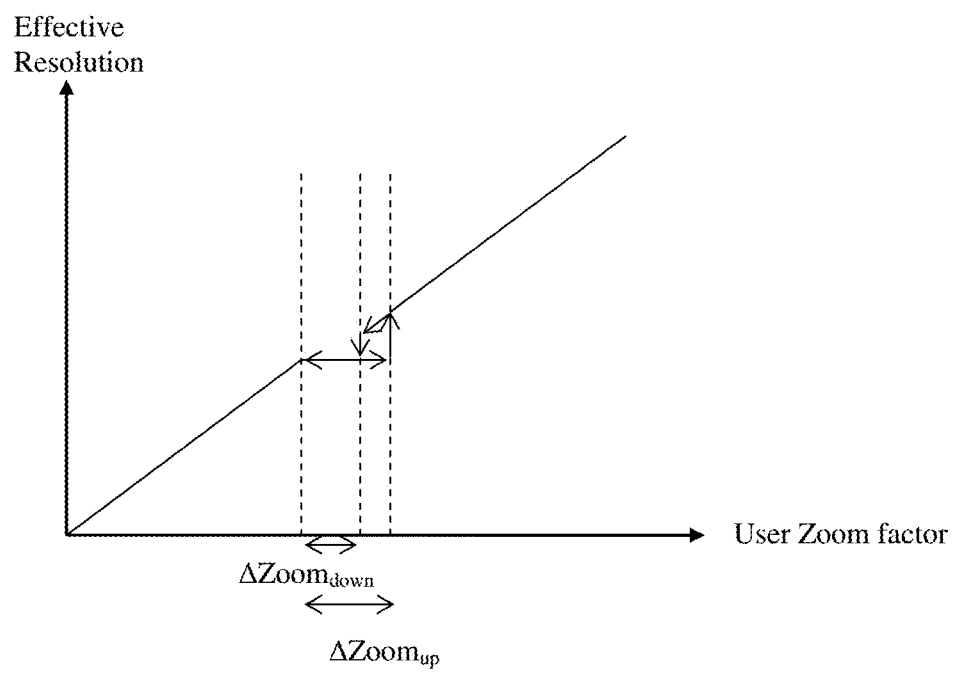


FIG. 7

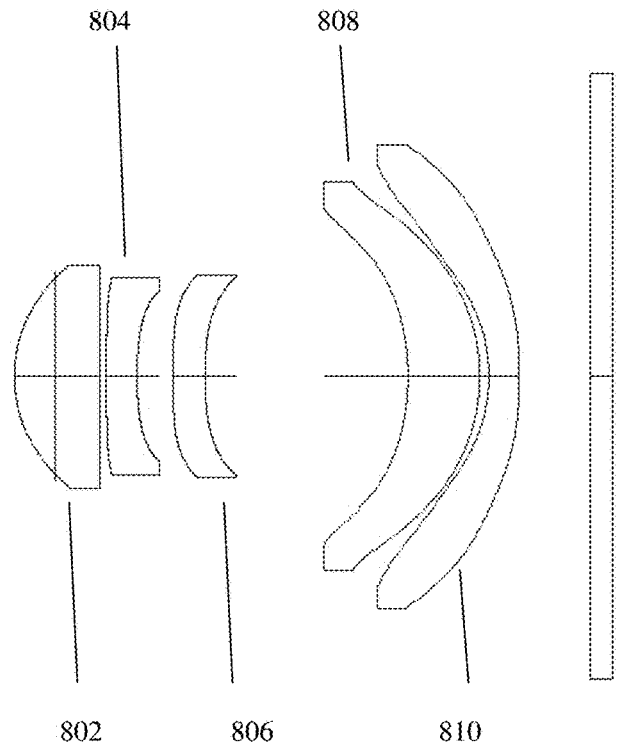


FIG. 8

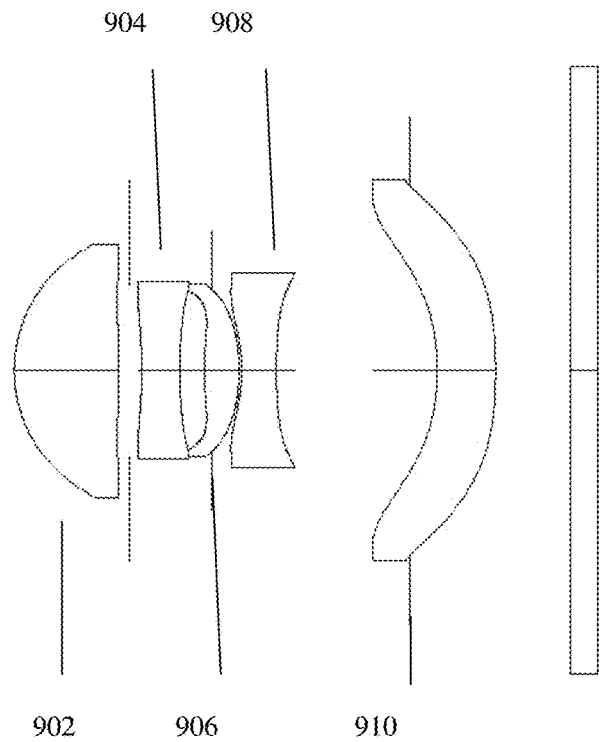


FIG. 9

US 10,225,479 B2

1

**DUAL APERTURE ZOOM DIGITAL  
CAMERA****CROSS REFERENCE TO RELATED  
APPLICATIONS**

This application is a Continuation application of U.S. patent application Ser. No. 15/865,869, filed Jan. 9, 2018, which was a Continuation application of U.S. patent application Ser. No. 15/424,853 filed Feb. 5, 2017, which was a Continuation application of U.S. patent application Ser. No. 14/880,251 filed Oct. 11, 2015 (issued as U.S. Pat. No. 9,661,233), which was a Continuation application of U.S. patent application Ser. No. 14/365,711 filed Jun. 16, 2014 (issued as U.S. Pat. No. 9,185,291), which was a 371 application from international patent application PCT/IB2014/062180 filed Jun. 12, 2014, and is related to and claims priority from U.S. Provisional Patent Application No. 61/834,486 having the same title and filed Jun. 13, 2013, which is incorporated herein by reference in its entirety.

**FIELD**

Embodiments disclosed herein relate in general to digital cameras and in particular to thin zoom digital cameras with both still image and video capabilities

**BACKGROUND**

Digital camera modules are currently being incorporated into a variety of host devices. Such host devices include cellular telephones, personal data assistants (PDAs), computers, and so forth. Consumer demand for digital camera modules in host devices continues to grow.

Host device manufacturers prefer digital camera modules to be small, so that they can be incorporated into the host device without increasing its overall size. Further, there is an increasing demand for such cameras to have higher-performance characteristics. One such characteristic possessed by many higher-performance cameras (e.g., standalone digital still cameras) is the ability to vary the focal length of the camera to increase and decrease the magnification of the image. This ability, typically accomplished with a zoom lens, is known as optical zooming. "Zoom" is commonly understood as a capability to provide different magnifications of the same scene and/or object by changing the focal length of an optical system, with a higher level of zoom associated with greater magnification and a lower level of zoom associated with lower magnification. Optical zooming is typically accomplished by mechanically moving lens elements relative to each other. Such zoom lenses are typically more expensive, larger and less reliable than fixed focal length lenses. An alternative approach for approximating the zoom effect is achieved with what is known as digital zooming. With digital zooming, instead of varying the focal length of the lens, a processor in the camera crops the image and interpolates between the pixels of the captured image to create a magnified but lower-resolution image.

Attempts to use multi-aperture imaging systems to approximate the effect of a zoom lens are known. A multi-aperture imaging system (implemented for example in a digital camera) includes a plurality of optical sub-systems (also referred to as "sub-cameras"). Each sub-camera includes one or more lenses and/or other optical elements which define an aperture such that received electro-magnetic radiation is imaged by the optical sub-system and a resulting image is directed towards a two-dimensional (2D) pixelated

2

image sensor region. The image sensor (or simply "sensor") region is configured to receive the image and to generate a set of image data based on the image. The digital camera may be aligned to receive electromagnetic radiation associated with scenery having a given set of one or more objects. The set of image data may be represented as digital image data, as well known in the art. Hereinafter in this description, "image" "image data" and "digital image data" may be used interchangeably. Also, "object" and "scene" may be used interchangeably.

Multi-aperture imaging systems and associated methods are described for example in US Patent Publications No. 2008/0030592, 2010/0277619 and 2011/0064327. In US 2008/0030592, two sensors are operated simultaneously to capture an image imaged through an associated lens. A sensor and its associated lens form a lens/sensor combination. The two lenses have different focal lengths. Thus, even though each lens/sensor combination is aligned to look in the same direction, each captures an image of the same subject but with two different fields of view (FOVs). One sensor is commonly called "Wide" and the other "Tele". Each sensor provides a separate image, referred to respectively as "Wide" (or "W") and "Tele" (or "T") images. A W-image reflects a wider FOV and has lower resolution than the T-image. The images are then stitched (fused) together to form a composite ("fused") image. In the composite image, the central portion is formed by the relatively higher-resolution image taken by the lens/sensor combination with the longer focal length, and the peripheral portion is formed by a peripheral portion of the relatively lower-resolution image taken by the lens/sensor combination with the shorter focal length. The user selects a desired amount of zoom and the composite image is used to interpolate values from the chosen amount of zoom to provide a respective zoom image. The solution offered by US 2008/0030592 requires, in video mode, very large processing resources in addition to high frame rate requirements and high power consumption (since both cameras are fully operational).

US 2010/0277619 teaches a camera with two lens/sensor combinations, the two lenses having different focal lengths, so that the image from one of the combinations has a FOV approximately 2-3 times greater than the image from the other combination. As a user of the camera requests a given amount of zoom, the zoomed image is provided from the lens/sensor combination having a FOV that is next larger than the requested FOV. Thus, if the requested FOV is less than the smaller FOV combination, the zoomed image is created from the image captured by that combination, using cropping and interpolation if necessary. Similarly, if the requested FOV is greater than the smaller FOV combination, the zoomed image is created from the image captured by the other combination, using cropping and interpolation if necessary. The solution offered by US 2010/0277619 leads to parallax artifacts when moving to the Tele camera in video mode.

In both US 2008/0030592 and US 2010/0277619, different focal length systems cause Tele and Wide matching FOVs to be exposed at different times using CMOS sensors. This degrades the overall image quality. Different optical F numbers ("F#") cause image intensity differences. Working with such a dual sensor system requires double bandwidth support, i.e. additional wires from the sensors to the following HW component. Neither US 2008/0030592 nor US 2010/0277619 deal with registration errors. Neither US 2008/000592 nor US 2010/0277619 refer to partial fusion, i.e. fusion of less than all the pixels of both Wide and Tele images in still mode.

US 10,225,479 B2

3

US 2011/0064327 discloses multi-aperture imaging systems and methods for image data fusion that include providing first and second sets of image data corresponding to an imaged first and second scene respectively. The scenes overlap at least partially in an overlap region, defining a first collection of overlap image data as part of the first set of image data, and a second collection of overlap image data as part of the second set of image data. The second collection of overlap image data is represented as a plurality of image data sub-cameras such that each of the sub-cameras is based on at least one characteristic of the second collection, and each sub-camera spans the overlap region. A fused set of image data is produced by an image processor, by modifying the first collection of overlap image data based on at least a selected one of, but less than all of, the image data sub-cameras. The systems and methods disclosed in this application deal solely with fused still images.

None of the known art references provide a thin (e.g. fitting in a cell-phone) dual-aperture zoom digital camera with fixed focal length lenses, the camera configured to operate in both still mode and video mode to provide still and video images, wherein the camera configuration uses partial or full fusion to provide a fused image in still mode and does not use any fusion to provide a continuous, smooth zoom in video mode.

Therefore there is a need for, and it would be advantageous to have thin digital cameras with optical zoom operating in both video and still mode that do not suffer from commonly encountered problems and disadvantages, some of which are listed above.

### SUMMARY

Embodiments disclosed herein teach the use of dual-aperture (also referred to as dual-lens or two-sensor) optical zoom digital cameras. The cameras include two sub-cameras, a Wide sub-camera and a Tele sub-camera, each sub-camera including a fixed focal length lens, an image sensor and an image signal processor (ISP). The Tele sub-camera is the higher zoom sub-camera and the Wide sub-camera is the lower zoom sub-camera. In some embodiments, the lenses are thin lenses with short optical paths of less than about 9 mm. In some embodiments, the thickness/effective focal length (EFL) ratio of the Tele lens is smaller than about 1. The image sensor may include two separate 2D pixelated sensors or a single pixelated sensor divided into at least two areas. The digital camera can be operated in both still and video modes. In still mode, zoom is achieved “with fusion” (full or partial), by fusing W and T images, with the resulting fused image including always information from both W and T images. Partial fusion may be achieved by not using fusion in image areas where the Tele image is not focused. This advantageously reduces computational requirements (e.g. time).

In video mode, optical zoom is achieved “without fusion”, by switching between the W and T images to shorten computational time requirements, thus enabling high video rate. To avoid discontinuities in video mode, the switching includes applying additional processing blocks, which include image scaling and shifting.

In order to reach optical zoom capabilities, a different magnification image of the same scene is captured (grabbed) by each camera sub-camera, resulting in FOV overlap between the two sub-cameras. Processing is applied on the two images to fuse and output one fused image in still mode. The fused image is processed according to a user zoom factor request. As part of the fusion procedure, up-sampling

4

may be applied on one or both of the grabbed images to scale it to the image grabbed by the Tele sub-camera or to a scale defined by the user. The fusion or up-sampling may be applied to only some of the pixels of a sensor. Down-sampling can be performed as well if the output resolution is smaller than the sensor resolution.

The cameras and associated methods disclosed herein address and correct many of the problems and disadvantages of known dual-aperture optical zoom digital cameras. They provide an overall zoom solution that refers to all aspects: optics, algorithmic processing and system hardware (HW). The proposed solution distinguishes between video and still mode in the processing flow and specifies the optical requirements and HW requirements. In addition, it provides an innovative optical design that enables a low TTL/EFL ratio using a specific lens curvature order.

Due to the large focal length, objects that are in front or behind the plane of focus appear very blurry, and a nice foreground-to-background contrast is achieved. However, it is difficult to create such a blur using a compact camera with a relatively short focal length and small aperture size, such as a cell-phone camera. In some embodiments, a dual-aperture zoom system disclosed herein can be used to capture a shallow DOF photo (shallow compared with a DOF of a Wide camera alone), by taking advantage of the longer focal length of the Tele lens. The reduced DOF effect provided by the longer Tele focal length can be further enhanced in the final image by fusing data from an image captured simultaneously with the Wide lens. Depending on the distance to the object, with the Tele lens focused on a subject of the photo, the Wide lens can be focused to a closer distance than the subject so that objects behind the subject appear very blurry. Once the two images are captured, information from the out-of-focus blurred background in the Wide image is fused with the original Tele image background information, providing a blurrier background and even shallower DOF.

In an embodiment there is provided a zoom digital camera comprising a Wide imaging section that includes a fixed focal length Wide lens with a Wide FOV, a Wide sensor and a Wide image signal processor (ISP), the Wide imaging section operative to provide Wide image data of an object or scene; a Tele imaging section that includes a fixed focal length Tele lens with a Tele FOV that is narrower than the Wide FOV, a Tele sensor and a Tele ISP, the Tele imaging section operative to provide Tele image data of the object or scene; and a camera controller operatively coupled to the Wide and Tele imaging sections, the camera controller configured to combine in still mode at least some of the Wide and Tele image data to provide a fused output image of the object or scene from a particular point of view (POV), and to provide without fusion continuous zoom video mode output images of the object or scene, a camera controller operatively coupled to the Wide and Tele imaging sections, the camera controller configured to combine in still mode at least some of the Wide and Tele image data to provide a fused output image of the object or scene from a particular point of view and to provide without fusion continuous zoom video mode output images of the object or scene, each output image having a respective output resolution, wherein the video output images are provided with a smooth transition when switching between a lower zoom factor (ZF) value and a higher ZF value or vice versa, wherein at the lower ZF value the output resolution is determined by the Wide sensor, and wherein at the higher ZF value the output resolution is determined by the Tele sensor.



US 10,225,479 B2

5

In an embodiment, the camera controller configuration to provide video output images with a smooth transition when switching between a lower ZF value and a higher ZF value or vice versa includes a configuration that uses at high ZF secondary information from the Wide camera and uses at low ZF secondary information from the Tele camera. As used herein, “secondary information” refers to white balance gain, exposure time, analog gain and color correction matrix.

In a dual-aperture camera image plane, as seen by each sub-camera (and respective image sensor), a given object will be shifted and have different perspective (shape). This is referred to as point-of-view (POV). The system output image can have the shape and position of either sub-camera image or the shape or position of a combination thereof. If the output image retains the Wide image shape then it has the Wide perspective POV. If it retains the Wide camera position then it has the Wide position POV. The same applies for Tele images position and perspective. As used in this description, the perspective POV may be of the Wide or Tele sub-cameras, while the position POV may shift continuously between the Wide and Tele sub-cameras. In fused images, it is possible to register Tele image pixels to a matching pixel set within the Wide image pixels, in which case the output image will retain the Wide POV (“Wide fusion”). Alternatively, it is possible to register Wide image pixels to a matching pixel set within the Tele image pixels, in which case the output image will retain the Tele POV (“Tele fusion”). It is also possible to perform the registration after either sub-camera image is shifted, in which case the output image will retain the respective Wide or Tele perspective POV.

In an embodiment there is provided a method for obtaining zoom images of an object or scene in both still and video modes using a digital camera, the method comprising the steps of providing in the digital camera a Wide imaging section having a Wide lens with a Wide FOV, a Wide sensor and a Wide image signal processor (ISP), a Tele imaging section having a Tele lens with a Tele FOV that is narrower than the Wide FOV, a Tele sensor and a Tele ISP, and a camera controller operatively coupled to the Wide and Tele imaging sections; and configuring the camera controller to combine in still mode at least some of the Wide and Tele image data to provide a fused output image of the object or scene from a particular point of view, and to provide without fusion continuous zoom video mode output images of the object or scene, each output image having a respective output resolution, wherein the video mode output images are provided with a smooth transition when switching between a lower ZF value and a higher ZF value or vice versa, and wherein at the lower ZF value the output resolution is determined by the Wide sensor while at the higher ZF value the output resolution is determined by the Tele sensor.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Non-limiting examples of embodiments disclosed herein are described below with reference to figures attached hereto that are listed following this paragraph. The drawings and descriptions are meant to illuminate and clarify embodiments disclosed herein, and should not be considered limiting in any way.

FIG. 1A shows schematically a block diagram illustrating a dual-aperture zoom imaging system disclosed herein;

FIG. 1B is a schematic mechanical diagram of the dual-aperture zoom imaging system of FIG. 1A:

6

FIG. 2 shows an example of Wide sensor, Tele sensor and their respective FOVs;

FIG. 3 shows a schematically embodiment of CMOS sensor image grabbing vs. time;

FIG. 4 shows schematically a sensor time configuration which enables sharing one sensor interface using dual sensor zoom system;

FIG. 5 shows an embodiment of a method disclosed herein for acquiring a zoom image in capture mode;

FIG. 6 shows an embodiment of a method disclosed herein for acquiring a zoom image in video/preview mode;

FIG. 7 shows a graph illustrating an effective resolution zoom factor;

FIG. 8 shows one embodiment of a lens block in a thin camera disclosed herein;

FIG. 9 shows another embodiment of a lens block in a thin camera disclosed herein.

#### DETAILED DESCRIPTION

FIG. 1A shows schematically a block diagram illustrating an embodiment of a dual-aperture zoom imaging system (also referred to simply as “digital camera” or “camera”) disclosed herein and numbered **100**. Camera **100** comprises a Wide imaging section (“sub-camera”) that includes a Wide lens block **102**, a Wide image sensor **104** and a Wide image processor **106**. Camera **100** further comprises a Tele imaging section (“sub-camera”) that includes a Tele lens block **108**, a Tele image sensor **110** and a Tele image processor **112**. The image sensors may be physically separate or may be part of a single larger image sensor. The Wide sensor pixel size can be equal to or different from the Tele sensor pixel size. Camera **100** further comprises a camera fusion processing core (also referred to as “controller”) **114** that includes a sensor control module **116**, a user control module **118**, a video processing module **126** and a capture processing module **128**, all operationally coupled to sensor control block **110**. User control module **118** comprises an operational mode function **120**, a region of interest (ROI) function **122** and a zoom factor (ZF) function **124**.

Sensor control module **116** is connected to the two sub-cameras and to the user control module **118** and used to choose, according to the zoom factor, which of the sensors is operational and to control the exposure mechanism and the sensor readout. Mode choice function **120** is used for choosing capture/video modes. ROI function **122** is used to choose a region of interest. As used herein, “ROI” is a user defined as a sub-region of the image that may be exemplarily 4% or less of the image area. The ROI is the region on which both sub-cameras are focused on. Zoom factor function **124** is used to choose a zoom factor. Video processing module **126** is connected to mode choice function **120** and used for video processing. Still processing module **128** is connected to the mode choice function **120** and used for high image quality still mode images. The video processing module is applied when the user desires to shoot in video mode. The capture processing module is applied when the user wishes to shoot still pictures.

FIG. 1B is a schematic mechanical diagram of the dual-aperture zoom imaging system of FIG. 1A. Exemplary dimensions: Wide lens TTL=4.2 mm and EFL=3.5 mm; Tele lens TTL=6 mm and EFL=7 mm; both Wide and Tele sensors 1/3 inch. External dimensions of Wide and Tele cameras: width (w) and length (l)=8.5 mm and height (h)=6.8 mm Distance “d” between camera centers=10 mm.

Following is a detailed description and examples of different methods of use of camera **100**.



## Design for Continuous and Smooth Zoom in Video Mode

In an embodiment, in order to reach high quality continuous and smooth optical zooming in video camera mode while reaching real optical zoom using fixed focal length sub-cameras, the system is designed according to the following rules (Equations 1-3):

$$\tan(\text{FOV}_{\text{Wide}})/\tan(\text{FOV}_{\text{Tele}})=\text{PL}_{\text{Wide}}/\text{PL}_{\text{video}} \quad (1)$$

where Tan refers to “tangent”, while  $\text{FOV}_{\text{Wide}}$  and  $\text{FOV}_{\text{Tele}}$  refer respectively to the Wide and Tele lens fields of view (in degrees). As used herein, the FOV is measured from the center axis to the corner of the sensor (i.e. half the angle of the normal definition).  $\text{PL}_{\text{Wide}}$  and  $\text{PL}_{\text{video}}$  refer respectively to the “in-line” (i.e. in a line) number of Wide sensor pixels and in-line number of output video format pixels. The ratio  $\text{PL}_{\text{Wide}}/\text{PL}_{\text{video}}$  is called an “oversampling ratio”. For example, in order to get full and continuous optical zoom experience with a 12 Mp sensor (sensor dimensions 4000×3000) and a required 1080p (dimension 1920×1080) video format, the FOV ratio should be  $4000/1920=2.083$ . Moreover, if the Wide lens FOV is given as  $\text{FOV}_{\text{Wide}}=37.5^\circ$ , the required Tele lens FOV is  $20.2^\circ$ . The zoom switching point is set according to the ratio between sensor pixels in-line and the number of pixels in-line in the video format and defined as:

$$Z_{\text{switch}}=\text{PL}_{\text{Wide}}/\text{PL}_{\text{video}} \quad (2)$$

Maximum optical zoom is reached according to the following formula:

$$Z_{\text{max}}=\tan(\text{FOV}_{\text{Wide}})/\tan(\text{FOV}_{\text{Tele}})*\text{PL}_{\text{Tele}}/\text{PL}_{\text{video}} \quad (3)$$

For example: for the configuration defined above and assuming  $\text{PL}_{\text{Tele}}=4000$  and  $\text{PL}_{\text{video}}=1920$ ,  $Z_{\text{max}}=4.35$ .

In an embodiment, the sensor control module has a setting that depends on the Wide and Tele FOVs and on a sensor oversampling ratio, the setting used in the configuration of each sensor. For example, when using a 4000×3000 sensor and when outputting a 1920×1080 image, the oversampling ratio is  $4000/1920=2.0833$ .

In an embodiment, the Wide and Tele FOVs and the oversampling ratio satisfy the condition

$$\begin{aligned} 0.8*\text{PL}_{\text{Wide}}/\text{PL}_{\text{video}} &< \tan(\text{FOV}_{\text{Wide}})/\tan(\text{FOV}_{\text{Tele}}) \\ &< 1.2*\text{PL}_{\text{Wide}}/\text{PL}_{\text{video}} \end{aligned} \quad (4)$$

## Still Mode Operation/Function

In still camera mode, the obtained image is fused from information obtained by both sub-cameras at all zoom levels, see FIG. 2, which shows a Wide sensor 202 and a Tele sensor 204 and their respective FOVs. Exemplarily, as shown, the Tele sensor FOV is half the Wide sensor FOV. The still camera mode processing includes two stages: (1) setting HW settings and configuration, where a first objective is to control the sensors in such a way that matching FOVs in both images (Tele and Wide) are scanned at the same time. A second objective is to control the relative exposures according to the lens properties. A third objective is to minimize the required bandwidth from both sensors for the ISPs; and (2) image processing that fuses the Wide and the Tele images to achieve optical zoom, improves SNR and provides wide dynamic range.

FIG. 3 shows image line numbers vs. time for an image section captured by CMOS sensors. A fused image is obtained by line (row) scans of each image. To prevent matching FOVs in both sensors to be scanned at different times, a particular configuration is applied by the camera controller on both image sensors while keeping the same frame rate. The difference in FOV between the sensors determines the relationship between the rolling shutter time

and the vertical blanking time for each sensor. In the particular configuration, the scanning is synchronized such that the same points of the object in each view are obtained simultaneously.

Specifically with reference to FIG. 3 and according to an embodiment of a method disclosed herein, the configuration to synchronize the scanning includes: setting the Tele sensor vertical blanking time  $\text{VB}_{\text{Tele}}$  to equal the Wide sensor vertical blanking time  $\text{VB}_{\text{Wide}}$  plus half the Wide sensor rolling shutter time  $\text{RST}_{\text{Wide}}$ ; setting the Tele and Wide sensor exposure times  $\text{ET}_{\text{Tele}}$  and  $\text{ET}_{\text{Wide}}$  to be equal or different; setting the Tele sensor rolling shutter time  $\text{RST}_{\text{Tele}}$  to be  $0.5*\text{RST}_{\text{Wide}}$ ; and setting the frame rates of the two sensors to be equal. This procedure results in identical image pixels in the Tele and Wide sensor images being exposed at the same time

In another embodiment, the camera controller synchronizes the Wide and Tele sensors so that for both sensors the rolling shutter starts at the same time.

The exposure times applied to the two sensors could be different, for example in order to reach same image intensity using different F# and different pixel size for the Tele and Wide systems. In this case, the relative exposure time may be configured according to the formula below:

$$\text{ET}_{\text{Tele}}=\text{ET}_{\text{Wide}}*(F\#_{\text{Tele}}/F\#_{\text{Wide}})^2*(\text{Pixel size}_{\text{Wide}}/\text{Pixel size}_{\text{Tele}})^2 \quad (5)$$

Other exposure time ratios may be applied to achieve wide dynamic range and improved SNR. Fusing two images with different intensities will result in wide dynamic range image.

In more detail with reference to FIG. 3, in the first stage, after the user chooses a required zoom factor ZF, the sensor control module configures each sensor as follows:

## 1) Cropping Index Wide Sensor:

$$Y_{\text{Wide start}}=1/2*PC_{\text{Wide}}(1-1/ZF)$$

$$Y_{\text{Wide end}}=1/2*PC_{\text{Wide}}(1+1/ZF)$$

where PC is the number of pixels in a column, and Y is the row number

## 2) Cropping Index Tele Sensor:

If  $ZF>\tan(\text{FOV}_{\text{Wide}})/\tan(\text{FOV}_{\text{Tele}})$ , then

$$Y_{\text{Tele start}}=1/2*PC_{\text{Tele}}(1-(1/ZF)*\tan(\text{FOV}_{\text{Tele}})/\tan(\text{FOV}_{\text{Wide}}))$$

$$Y_{\text{Tele end}}=1/2*PC_{\text{Tele}}(1+(1/ZF)*\tan(\text{FOV}_{\text{Tele}})/\tan(\text{FOV}_{\text{Wide}}))$$

If  $ZF<\tan(\text{FOV}_{\text{Wide}})/\tan(\text{FOV}_{\text{Tele}})$ , then

$$Y_{\text{Tele start}}=0$$

$$Y_{\text{Tele end}}=PC_{\text{Tele}}$$

This will result in an exposure start time of the Tele sensor with a delay of (in numbers of lines, relative to the Wide sensor start time):

$$(1-ZF/(\tan(\text{FOV}_{\text{Wide}})/\tan(\text{FOV}_{\text{Tele}})))/2*\text{FPS} \quad (6)$$

where FPS is the sensor's frame per second configuration. In cases where  $ZF>\tan(\text{FOV}_{\text{Wide}})/\tan(\text{FOV}_{\text{Tele}})$ , no delay will be introduced between Tele and Wide exposure starting point. For example, for a case where  $\tan(\text{FOV}_{\text{Wide}})/\tan(\text{FOV}_{\text{Tele}})=2$  and  $ZF=1$ , the Tele image first pixel is exposed  $1/4*(1/\text{FPS})$  second after the Wide image first pixel was exposed.

After applying the cropping according to the required zoom factor, the sensor rolling shutter time and the vertical blank should be configured in order to satisfy the equation to keep the same frame rate:

$$VB_{Wide} + RST_{Wide} = VB_{Tele} + RST_{Tele} \quad (7)$$

FIG. 3 exemplifies Eq. (7). One way to satisfy Eq. (7) is to increase the  $RST_{Wide}$ . Controlling the  $RST_{Wide}$  may be done by changing the horizontal blanking (HB) of the Wide sensor. This will cause a delay between the data coming out from each row of the Wide sensor.

Generally, working with a dual-sensor system requires multiplying the bandwidth to the following block, for example the ISP. For example, using 12 Mp working at 30 fps, 10 bit per pixel requires working at 3.6 Gbit/sec. In this example, supporting this bandwidth requires 4 lanes from each sensor to the respective following ISP in the processing chain. Therefore, working with two sensors requires double bandwidth (7.2 Gbit/sec) and 8 lanes connected to the respective following blocks. The bandwidth can be reduced by configuring and synchronizing the two sensors. Consequently, the number of lanes can be half that of a conventional configuration (3.6 Gbit/sec).

FIG. 4 shows schematically a sensor time configuration that enables sharing one sensor interface using a dual-sensor zoom system, while fulfilling the conditions in the description of FIG. 3 above. For simplicity, assuming the Tele sensor image is magnified by a factor of 2 compared with the Wide sensor image, the Wide sensor horizontal blanking time  $HB_{Wide}$  is set to twice the Wide sensor line readout time. This causes a delay between output Wide lines. This delay time matches exactly the time needed to output two lines from the Tele sensor. After outputting two lines from the Tele sensor, the Tele sensor horizontal blanking time  $HB_{Tele}$  is set to be one Wide line readout time, so, while the Wide sensor outputs a row from the sensor, no data is being output from the Tele sensor. For this example, every 3<sup>rd</sup> line in the Tele sensor is delayed by an additional  $HB_{Tele}$ . In this delay time, one line from the Wide sensor is output from the dual-sensor system. After the sensor configuration stage, the data is sent in parallel or by using multiplexing into the processing section.

FIG. 5 shows an embodiment of a method disclosed herein for acquiring a zoom image in still mode. In ISP step 502, the data of each sensor is transferred to the respective ISP component, which performs on the data various processes such as denoising, demosaicing, sharpening, scaling, etc., as known in the art. After the processing in step 502, all following actions are performed in capture processing core 128: in rectification step 504, both Wide and Tele images are aligned to be on the epipolar line; in registration step 506, mapping between the Wide and the Tele aligned images is performed to produce a registration map; in resampling step 508, the Tele image is resampled according to the registration map, resulting in a re-sampled Tele image; in decision step 510, the re-sampled Tele image and the Wide image are processed to detect errors in the registration and to provide a decision output. In more detail, in step 510, the re-sampled Tele image data is compared with the Wide image data and if the comparison detects significant dissimilarities, an error is indicated. In this case, the Wide pixel values are chosen to be used in the output image. Then, in fusion step 512, the decision output, re-sampled Tele image and the Wide image are fused into a single zoom image.

To reduce processing time and power, steps 506, 508, 510, 512 could be bypassed by not fusing the images in non-focused areas. In this case, all steps specified above should be applied on focused areas only. Since the Tele optical system will introduce shallower depth of field than the Wide optical system, defocused areas will suffer from lower contrast in the Tele system.

#### Zoom-In and Zoom-Out in Still Camera Mode

We define the following:  $TFOV = \tan(\text{camera FOV}/2)$ . “Low ZF” refers to all ZF that comply with  $ZF < \text{Wide TFOV}/\text{Tele TFOV}$ . “High ZF” refers to all ZF that comply with  $ZF > \text{Wide TFOV}/\text{Tele TFOV}$ . “ZFT” refers to a ZF that complies with  $ZF = \text{Wide TFOV}/\text{Tele TFOV}$ . In one embodiment, zoom-in and zoom-out in still mode is performed as follows:

Zoom-in: at low ZF up to slightly above ZFT, the output image is a digitally zoomed, Wide fusion output. For the up-transfer ZF, the Tele image is shifted and corrected by global registration (GR) to achieve smooth transition. Then, the output is transformed to a Tele fusion output. For higher (than the up-transfer) ZF, the output is the Tele fusion output digitally zoomed.

Zoom-out: at high ZF down to slightly below ZFT, the output image is a digitally zoomed, Tele fusion output. For the down-transfer ZF, the Wide image is shifted and corrected by GR to achieve smooth transition. Then, the output is transformed to a Wide fusion output. For lower (than the down-transfer) ZF, the output is basically the down-transfer ZF output digitally zoomed but with gradually smaller Wide shift correction, until for  $ZF=1$  the output is the unchanged Wide camera output.

In another embodiment, zoom-in and zoom-out in still mode is performed as follows:

Zoom-in: at low ZF up to slightly above ZFT, the output image is a digitally zoomed, Wide fusion output. For the up-transfer ZF and above, the output image is the Tele fusion output.

Zoom-out: at high ZF down to slightly below ZFT, the output image is a digitally zoomed, Tele fusion output. For the down-transfer ZF and below, the output image is the Wide fusion output.

#### Video Mode Operation/Function Smooth Transition

When a dual-aperture camera switches the camera output between sub-cameras or points of view, a user will normally see a “jump” (discontinuous) image change. However, a change in the zoom factor for the same camera and POV is viewed as a continuous change. A “smooth transition” is a transition between cameras or POVs that minimizes the jump effect. This may include matching the position, scale, brightness and color of the output image before and after the transition. However, an entire image position matching between the sub-camera outputs is in many cases impossible, because parallax causes the position shift to be dependent on the object distance. Therefore, in a smooth transition as disclosed herein, the position matching is achieved only in the ROI region while scale brightness and color are matched for the entire output image area.

#### Zoom-In and Zoom-Out in Video Mode

In video mode, sensor oversampling is used to enable continuous and smooth zoom experience. Processing is applied to eliminate the changes in the image during cross-over from one sub-camera to the other. Zoom from 1 to  $Z_{switch}$  is performed using the Wide sensor only. From  $Z_{switch}$  and on, it is performed mainly by the Tele sensor. To prevent “jumps” (roughness in the image), switching to the Tele image is done using a zoom factor which is a bit higher ( $Z_{switch} + \Delta Z_{zoom}$ ) than  $Z_{switch}$ .  $\Delta Z_{zoom}$  is determined according to the system’s properties and is different for cases where zoom-in is applied and cases where zoom-out is applied ( $\Delta Z_{zoom_{in}} \neq \Delta Z_{zoom_{out}}$ ). This is done to prevent residual jumps artifacts to be visible at a certain zoom factor. The switching between sensors, for an increasing zoom and for decreasing zoom, is done on a different zoom factor.

US 10,225,479 B2

11

The zoom video mode operation includes two stages: (1) sensor control and configuration, and (2) image processing. In the range from 1 to  $Z_{switch}$ , only the Wide sensor is operational, hence, power can be supplied only to this sensor. Similar conditions hold for a Wide AF mechanism. From  $Z_{switch} + \Delta Zoom$  to  $Z_{max}$  only the Tele sensor is operational, hence, power is supplied only to this sensor. Similarly, only the Tele sensor is operational and power is supplied only to it for a Tele AF mechanism. Another option is that the Tele sensor is operational and the Wide sensor is working in low frame rate. From  $Z_{switch}$  to  $Z_{switch} + \Delta Zoom$ , both sensors are operational.

Zoom-in: at low ZF up to slightly above ZFT, the output image is the digitally zoomed, unchanged Wide camera output. For the up-transfer ZF, the output is a transformed Tele sub-camera output, where the transformation is performed by a global registration (GR) algorithm to achieve smooth transition. For higher (than the up-transfer), the output is the transfer ZF output digitally zoomed.

Zoom-out: at high ZF down to slightly below ZFT, the output image is the digitally zoomed transformed Tele camera output. For the down-transfer ZF, the output is a shifted Wide camera output, where the Wide shift correction is performed by the GR algorithm to achieve smooth transition, i.e. with no jump in the ROI region. For lower (than the down-transfer) ZF, the output is basically the down-transfer ZF output digitally zoomed but with gradually smaller Wide shift correction, until for ZF=1 the output is the unchanged Wide camera output.

FIG. 6 shows an embodiment of a method disclosed herein for acquiring a zoom image in video/preview mode for 3 different zoom factor (ZF) ranges: (a) ZF range=1:  $Z_{switch}$ ; (b) ZF range= $Z_{switch}$ :  $Z_{switch} + \Delta Zoom_{in}$ ; and (c) Zoom factor range= $Z_{switch} + \Delta Zoom_{in}$ :  $Z_{max}$ . The description is with reference to a graph of effective resolution vs. zoom value (FIG. 7). In step 602, sensor control module 116 chooses (directs) the sensor (Wide, Tele or both) to be operational. Specifically, if the ZF range=1:  $Z_{switch}$ , module 116 directs the Wide sensor to be operational and the Tele sensor to be non-operational. If the ZF range is  $Z_{switch}$ :  $Z_{switch} + \Delta Zoom_{in}$ , module 116 directs both sensors to be operational and the zoom image is generated from the Wide sensor. If the ZF range is  $Z_{switch} + \Delta Zoom_{in}$ :  $Z_{max}$ , module 116 directs the Wide sensor to be non-operational and the Tele sensor to be operational. After the sensor choice in step 602, all following actions are performed in video processing core 126. Optionally, in step 604, color balance is calculated if two images are provided by the two sensors. Optionally yet, in step 606, the calculated color balance is applied in one of the images (depending on the zoom factor). Further optionally, in step 608, registration is performed between the Wide and Tele images to output a transformation coefficient. The transformation coefficient can be used to set an AF position in step 610. In step 612, an output of any of steps 602-608 is applied on one of the images (depending on the zoom factor) for image signal processing that may include denoising, demosaicing, sharpening, scaling, etc. In step 614, the processed image is resampled according to the transformation coefficient, the requested ZF (obtained from zoom function 124) and the output video resolution (for example 1080p). To avoid a transition point to be executed at the same ZF,  $\Delta Zoom$  can change while zooming in and while zooming out. This will result in hysteresis in the sensor switching point.

In more detail, for ZF range 1:  $Z_{switch}$ , for  $ZF < Z_{switch}$ , the Wide image data is transferred to the ISP in step 612 and resampled in step 614. For ZF range= $Z_{switch}$ :  $Z_{switch} +$

12

$\Delta Zoom_{in}$ , both sensors are operational and the zoom image is generated from the Wide sensor. The color balance is calculated for both images according to a given ROI. In addition, for a given ROI, registration is performed between the Wide and Tele images to output a transformation coefficient. The transformation coefficient is used to set an AF position. The transformation coefficient includes the translation between matching points in the two images. This translation can be measured in a number of pixels. Different translations will result in a different number of pixel movements between matching points in the images. This movement can be translated into depth and the depth can be translated into an AF position. This enables to set the AF position by only analyzing two images (Wide & Tele). The result is fast focusing.

Both color balance ratios and transformation coefficient are used in the ISP step. In parallel, the Wide image is processed to provide a processed image, followed by resampling. For ZF range= $Z_{switch} + \Delta Zoom_{in}$ :  $Z_{max}$  and for Zoom factor  $> Z_{switch} + \Delta Zoom_{in}$ , the color balance calculated previously is now applied on the Tele image. The Tele image data is transferred to the ISP in step 612 and resampled in step 614. To eliminate crossover artifacts and to enable smooth transition to the Tele image, the processed Tele image is resampled according to the transformation coefficient, the requested ZF (obtained from zoom function 124) and the output video resolution (for example 1080p).

FIG. 7 shows the effective resolution as a function of the zoom factor for a zoom-in case and for a zoom-out case.  $\Delta Zoom_{up}$  is set when we zoom in, and  $\Delta Zoom_{down}$  is set when we zoom out. Setting  $\Delta Zoom_{up}$  to be different from  $\Delta Zoom_{down}$  will result in transition between the sensors to be performed at different zoom factor ("hysteresis") when zoom-in is used and when zoom-out is used. This hysteresis phenomenon in the video mode results in smooth continuous zoom experience.

#### Optical Design

Additional optical design considerations were taken into account to enable reaching optical zoom resolution using small total track length (TTL). These considerations refer to the Tele lens. In an embodiment, the camera is "thin" (see also FIG. 1B) in the sense that it has an optical path of less than 9 mm and a thickness/focal length (FP) ratio smaller than about 0.85. Exemplarily, as shown in FIG. 8, such a thin camera has a lens block that includes (along an optical axis starting from an object) five lenses: a first lens element 802 with positive power and two lenses 804 and 806 with negative power, a fourth lens 808 with positive power and a fifth lens 810 with negative power. In the embodiment of FIG. 8, the EFL is 7 mm, the TTL is 4.7 mm,  $f=6.12$  and  $FOV=20^\circ$ . Thus the Tele lens TTL/EFL ratio is smaller than 0.9. In other embodiments, the Tele lens TTL/EFL ratio may be smaller than 1.

In another embodiment of a lens block in a thin camera, shown in FIG. 9, the camera has a lens block that includes (along an optical axis starting from an object) a first lens element 902 with positive power, a second lens element 904 with negative power, a third lens element with positive power 906 and a fourth lens element with negative power 908, and a fifth lens element 910 with positive or negative power. In this embodiment,  $f=7.14$ ,  $F\# = 3.5$ ,  $TTL=5.8$  mm and  $FOV=22.7^\circ$ .

In conclusion, dual aperture optical zoom digital cameras and associate methods disclosed herein reduce the amount of processing resources, lower frame rate requirements, reduce power consumption, remove parallax artifacts and provide continuous focus (or provide loss of focus) when changing

US 10,225,479 B2

13

from Wide to Tele in video mode. They provide a dramatic reduction of the disparity range and avoid false registration in capture mode. They reduce image intensity differences and enable work with a single sensor bandwidth instead of two, as in known cameras.

All patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual patent application was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present disclosure.

While this disclosure has been described in terms of certain embodiments and generally associated methods, alterations and permutations of the embodiments and methods will be apparent to those skilled in the art. The disclosure is to be understood as not limited by the specific embodiments described herein, but only by the scope of the appended claims.

What is claimed is:

1. A dual-aperture digital camera for imaging an object or scene, comprising:

- a) a Wide camera comprising a Wide lens and a Wide image sensor, the Wide camera having a respective field of view  $FOV_W$  and being operative to provide a Wide image of the object or scene;
- b) a Tele camera comprising a Tele lens and a Tele image sensor, the Tele camera having a respective field of view  $FOV_T$  narrower than  $FOV_W$  and being operative to provide a Tele image of the object or scene, wherein the Tele lens has a respective effective focal length  $EFL_T$  and total track length  $TTL_T$  fulfilling the condition  $EFL_T/TTL_T > 1$ ;
- c) a first autofocus (AF) mechanism coupled mechanically to, and used to perform an AF action on the Wide lens;
- d) a second AF mechanism coupled mechanically to, and used to perform an AF action on the Tele lens; and
- e) a camera controller operatively coupled to the first and second AF mechanisms and to the Wide and Tele image sensors and configured to control the AF mechanisms and to process the Wide and Tele images to create a fused image, wherein areas in the Tele image that are not focused are not combined with the Wide image to create the fused image and wherein the camera controller is further operative to output the fused image with a point of view (POV) of the Wide camera by mapping Tele image pixels to matching pixels within the Wide image.

2. The dual-aperture digital camera of claim 1, wherein the camera controller is further configured to perform rectification of the Wide and Tele images by aligning these images to be on an approximately epipolar line to obtain rectified Wide and Tele images.

3. The dual-aperture digital camera of claim 2, wherein the camera controller is further configured to perform mapping between the rectified Wide and Tele images to produce a registration map.

4. The dual-aperture digital camera of claim 3, wherein the camera controller is further configured to perform resampling of the Tele image according to the registration map to provide a re-sampled Tele image.

5. The dual-aperture digital camera of claim 4, wherein the camera controller is further configured to process the re-sampled Tele image and the Wide image to detect an error in the registration and to provide a decision output.

14

6. The dual-aperture digital camera of claim 5, wherein, if an error is detected, the camera controller is further configured to choose Wide pixel values to be used in the output image for pixels that caused the error.

7. The dual-aperture digital camera of claim 6, wherein the Wide and Tele image sensors have pixels with identical pixel counts and with respective pixel sizes Pixel size<sub>Wide</sub> and Pixel size<sub>Tele</sub> wherein Pixel size<sub>Wide</sub> is equal to Pixel size<sub>Tele</sub>, wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , and wherein the camera controller is further configured to synchronize the Wide and Tele image sensors to start exposure at the same time.

8. The dual-aperture digital camera of claim 6, wherein the Wide and Tele image sensors have pixels with identical pixel counts and with respective pixel sizes Pixel size<sub>Wide</sub> and Pixel size<sub>Tele</sub> wherein Pixel size<sub>Wide</sub> is not equal to Pixel size<sub>Tele</sub>, wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , and wherein the camera controller is further configured to synchronize the Wide and Tele image sensors to start exposure at the same time.

9. The dual-aperture digital camera of claim 6, wherein the Wide and Tele image sensors have pixels with respective pixel sizes Pixel size<sub>Wide</sub> and Pixel size<sub>Tele</sub> and wherein Pixel size<sub>Wide</sub> is not equal to Pixel size<sub>Tele</sub>, wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , and wherein the camera controller is further configured to synchronize the Wide and Tele image sensors to start exposure at the same time.

10. The dual-aperture digital camera of claim 1, wherein the Wide and Tele image sensors have pixels with identical pixel counts.

11. The dual-aperture digital camera of claim 10, wherein the pixel count is 12 MP.

12. The dual-aperture digital camera of claim 1, wherein the Wide and Tele image sensors have pixels with respective pixel sizes Pixel size<sub>Wide</sub> and Pixel size<sub>Tele</sub> and wherein Pixel size<sub>Wide</sub> is equal to Pixel size<sub>Tele</sub>.

13. The dual-aperture digital camera of claim 1, wherein the Wide and Tele image sensors have pixels with respective pixel sizes Pixel size<sub>Wide</sub> and Pixel size<sub>Tele</sub> and wherein Pixel size<sub>Wide</sub> is not equal to Pixel size<sub>Tele</sub>.

14. The dual-aperture digital camera of claim 1, wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ .

15. The dual-aperture digital camera of claim 14, wherein the camera controller is further configured to synchronize scanning of the Wide and Tele image sensors such that matching FOVs in the Wide and Tele images are scanned at the same time.

16. The dual-aperture digital camera of claim 14, wherein the camera controller is further configured to synchronize the Wide and Tele image sensors to start exposure at the same time.

17. The dual-aperture digital camera of claim 1, wherein the Wide and Tele lenses have respective F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$  and wherein the camera controller is further configured to set respective Wide and Tele image sensor exposure times  $ET_{Wide}$  and  $ET_{Tele}$  to fulfill the condition  $ET_{Tele} = ET_{Wide} \times (F\#_{Tele}/F\#_{Wide})^2 \times (\text{Pixel size}_{Wide}/\text{Pixel size}_{Tele})^2$ .

18. The dual-aperture digital camera of claim 1, wherein the Wide and Tele lenses have respective F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$  and wherein the camera controller is further configured to set respective Wide and Tele image sensor exposure times  $ET_{Wide}$  and  $ET_{Tele}$  to be equal.

19. A dual-aperture digital camera for imaging an object or scene, comprising:



US 10,225,479 B2

15

- a) a Wide camera comprising a Wide lens and a Wide image sensor, the Wide camera having a respective field of view  $FOV_W$  and being operative to provide a Wide image of the object or scene;
- b) a Tele camera comprising a Tele lens and a Tele image sensor, the Tele camera having a respective field of view  $FOV_T$  narrower than  $FOV_W$  and being operative to provide a Tele image of the object or scene, wherein the Tele lens has a respective effective focal length  $EFL_T$  and total track length  $TTL_T$  fulfilling the condition  $EFL_T/TTL_T > 1$ ;
- c) a first autofocus (AF) mechanism coupled mechanically to, and used to perform an AF action on the Wide lens;
- d) a second AF mechanism coupled mechanically to, and used to perform an AF action on the Tele lens, wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , wherein the Wide and Tele image sensors have pixels with respective pixel sizes  $Pixel\ size_{Wide}$  and  $Pixel\ size_{Tele}$  wherein  $Pixel\ size_{Wide}$  is not equal to  $Pixel\ size_{Tele}$ , and wherein the Tele camera has a Tele camera depth of field ( $DOF_T$ ) shallower than a  $DOF$  of the Wide camera ( $DOF_W$ ); and
- e) a camera controller operatively coupled to the first and second AF mechanisms and to the Wide and Tele image sensors and configured to control the AF mechanisms, to process the Wide and Tele images to find translations between matching points in the images to calculate depth information and to create a fused image suited for portrait photos, the fused image having a  $DOF$  shallower than  $DOF_T$  and having a blurred background.

20. The dual-aperture digital camera of claim 19, wherein the Tele lens includes five lens elements along an optical axis from an object side to an image side, starting from the object side with a first lens element with positive power, a second lens element with negative power, a fourth lens element with negative power and a fifth lens element, wherein the largest distance between consecutive lens elements along the optical axis is a distance between the fourth lens element and the fifth lens element.

21. The dual-aperture digital camera of claim 20, wherein the fused image having a  $DOF$  shallower than  $DOF_T$  is output as a portrait photo similar to a portrait photo taken with a digital single-lens reflex (DSLR) camera.

22. The dual-aperture digital camera of claim 21, wherein the DSLR has a focal length between 50-80 mm.

23. A method comprising:

- a) providing a dual-camera comprising a Wide camera and a Tele camera, the Wide and Tele cameras having respective Wide and Tele lenses, Wide and Tele image sensors and Wide and Tele fields of view  $FOV_W$  and  $FOV_T$ , wherein  $FOV_T$  is narrower than  $FOV_W$ , wherein the Tele lens has a respective effective focal length  $EFL_T$  and total track length  $TTL_T$  fulfilling the condition  $EFL_T/TTL_T > 1$ ;
- b) acquiring a Wide image with the Wide sensor and a Tele image with the Tele sensor;
- c) processing the Wide and Tele images to create a fused image, wherein areas in the Tele image that are not focused are not combined with the Wide image to create the fused image; and
- d) outputting the fused image with a point of view (POV) of the Wide camera by mapping Tele image pixels to matching pixels within the Wide image.

16

24. The method of claim 23, further comprising rectifying the Wide and Tele images by aligning these images to be on an approximately epipolar line to obtain rectified Wide and Tele images.

25. The method of claim 24, further comprising mapping between the rectified Wide and Tele images to produce a registration map.

26. The method of claim 25, further comprising resampling the Tele image according to the registration map to provide a re-sampled Tele image.

27. The method of claim 26, further comprising processing the re-sampled Tele image and the Wide image to detect an error in the registration and to provide a decision output.

28. The method of claim 27, wherein if an error is detected, further comprising choosing Wide pixel values to be used in the output image for those pixels that caused the error.

29. The method of claim 28, wherein the Wide and Tele image sensors have pixels with identical pixel counts and with respective pixel sizes  $Pixel\ size_{Wide}$  and  $Pixel\ size_{Tele}$  wherein  $Pixel\ size_{Wide}$  is equal to  $Pixel\ size_{Tele}$  and wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , the method further comprising synchronizing the Wide and Tele image sensors to start exposure at the same time.

30. The method of claim 28, wherein the Wide and Tele image sensors have pixels with identical pixel counts and with respective pixel sizes  $Pixel\ size_{Wide}$  and  $Pixel\ size_{Tele}$  wherein  $Pixel\ size_{Wide}$  is not equal to  $Pixel\ size_{Tele}$  and wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , the method further comprising synchronizing the Wide and Tele image sensors to start exposure at the same time.

31. The method of claim 28, wherein the Wide and Tele image sensors have pixels with respective pixel sizes  $Pixel\ size_{Wide}$  and  $Pixel\ size_{Tele}$  wherein  $Pixel\ size_{Wide}$  is not equal to  $Pixel\ size_{Tele}$  and wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , the method further comprising synchronizing the Wide and Tele image sensors to start exposure at the same time.

32. The method of claim 23, wherein the Wide and Tele image sensors have pixels with identical pixel counts.

33. The method of claim 32, wherein the pixel count is 12 MP.

34. The method of claim 23, wherein the Wide and Tele image sensors have pixels with respective pixel sizes  $Pixel\ size_{Wide}$  and  $Pixel\ size_{Tele}$  and wherein  $Pixel\ size_{Wide}$  is equal to  $Pixel\ size_{Tele}$ .

35. The method of claim 23, wherein the Wide and Tele image sensors have pixels with respective pixel sizes  $Pixel\ size_{Wide}$  and  $Pixel\ size_{Tele}$  and wherein  $Pixel\ size_{Wide}$  is not equal to  $Pixel\ size_{Tele}$ .

36. The method of claim 23, wherein the Wide and Tele lenses have different F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ .

37. The method of claim 36, further comprising synchronizing scanning of the Wide and Tele image sensors such that matching FOVs in the Wide and Tele images are scanned at the same time.

38. The method of claim 36, further comprising synchronizing the Wide and Tele image sensors to start exposure at the same time.

39. The method of claim 23, wherein the Wide and Tele lenses have respective F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , the method further comprising setting respective Wide and Tele image sensor exposure times  $ET_{Wide}$  and  $ET_{Tele}$  to fulfill the condition  $ET_{Tele} = ET_{Wide} \times (F\#_{Tele}/F\#_{Wide})^2 \times (Pixel\ size_{Wide}/Pixel\ size_{Tele})^2$ .

US 10,225,479 B2

17

40. The method of claim 23, wherein the Wide and Tele lenses have respective F numbers  $F\#_{Wide}$  and  $F\#_{Tele}$ , the method further comprising setting respective Wide and Tele image sensor exposure times  $ET_{Wide}$  and  $ET_{Tele}$  to be equal.

\* \* \* \* \*

5

18